


ECHO-PIEZO BUZZER


B10 SERIES

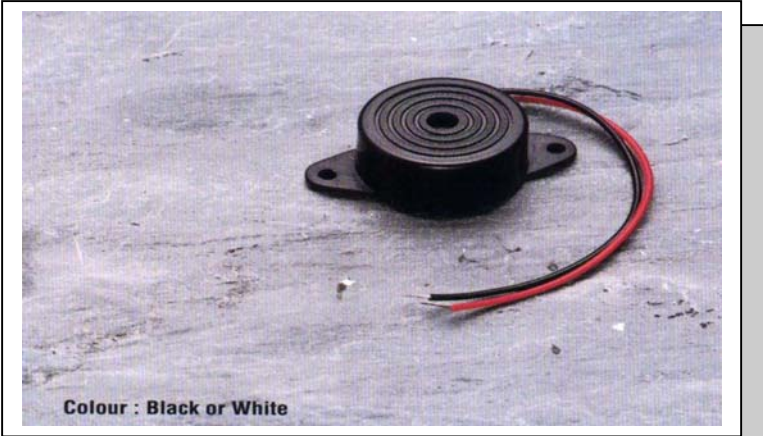

FEATURES:


- Medium to loud sound output
- Low current consumption
- Extremely durable & long life
- Operating temperature -20°C to $+70^{\circ}\text{C}$
- Storage temperature -30°C to $+70^{\circ}\text{C}$

DIMENSIONS:

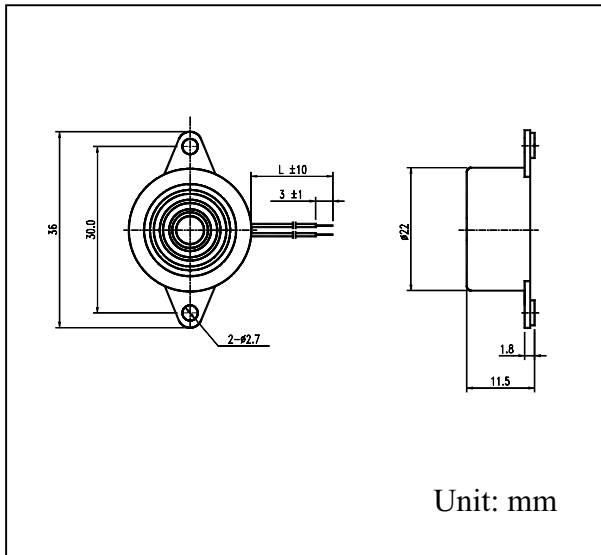

L=80mm, standard (changes as your request)

CHARACTERISTICS:

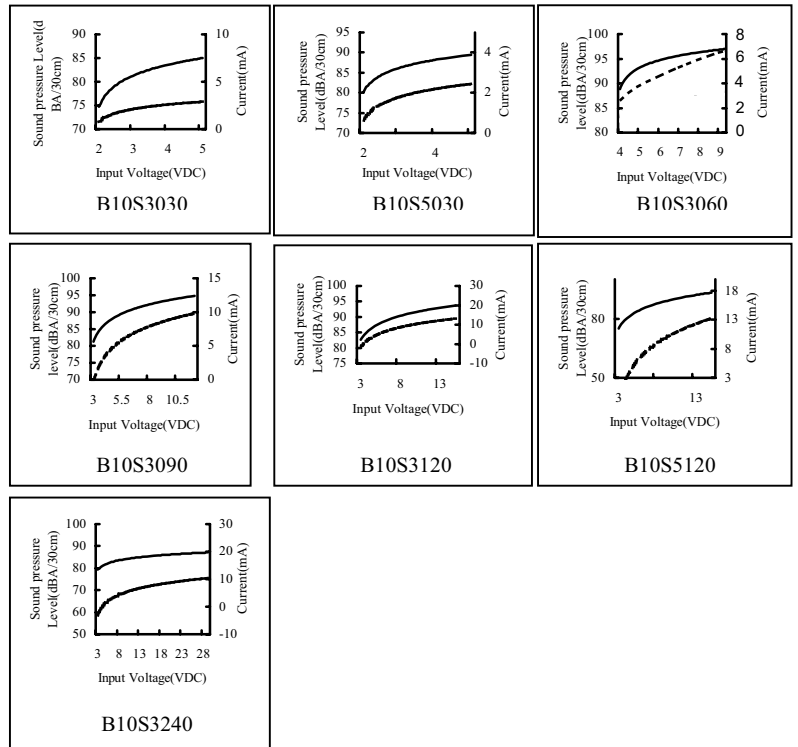

Remark: ——— Pressure level - - - - - Current

SPECIFICATIONS:

Model No.	Operating Voltage (VDC)	Rated Voltage (VDC)	Max. Current at Rated Voltage (mA)	Frequency (kHz)	Min. Sound Pressure at Rated Voltage (dBA/30cm)	Pulse Rate at Rated Voltage (Pulse/Sec)	Tone	Terminal
B10S3030	2-5	3	5	3.3±0.5	80	NIL	SINGLE	LEAD
B10S5030	2-5	3	5	5.0±1.0	80	NIL	SINGLE	LEAD
B10S3060	3-9	6	10	3.3±0.5	85	NIL	SINGLE	LEAD
B10S3090	3-12	9	15	3.3±0.5	90	NIL	SINGLE	LEAD
B10S3120	3-16	12	20	3.3±0.5	90	NIL	SINGLE	LEAD
B10S5120	3-16	12	20	5.0±1.0	90	NIL	SINGLE	LEAD
B10S3240	3-28	24	20	3.3±0.5	90	NIL	SINGLE	LEAD