


ECHO-PIEZO BUZZER


B19 SERIES

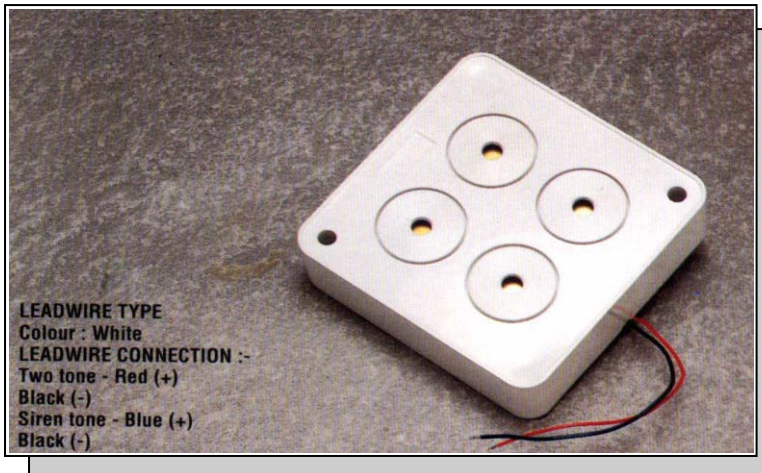


FEATURES:

- Sound-bomb II
- Single/Two/Siren tone
- Piercing loudness
- Rigid construction
- Screw mounting with leadwire
- Operating temperature -20°C --- $+70^{\circ}\text{C}$
- Storage temperature -30°C --- $+70^{\circ}\text{C}$

DIMENSIONS:

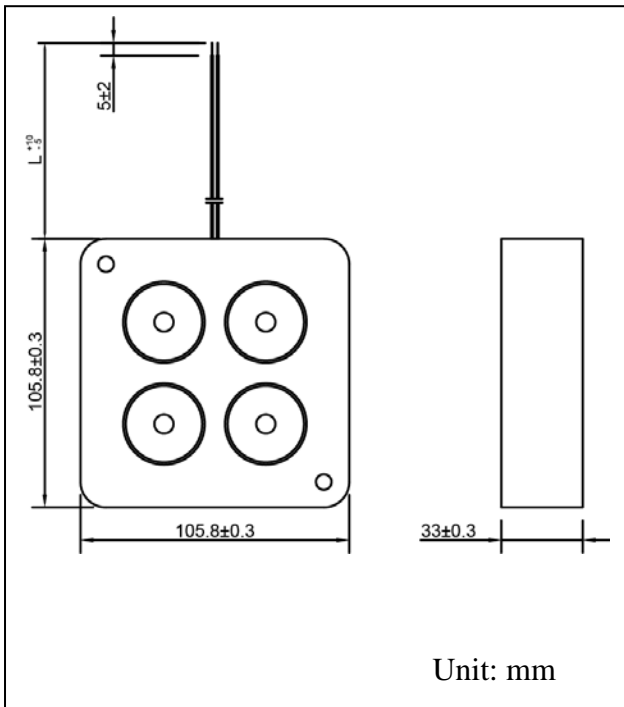

CHARACTERISTICS:

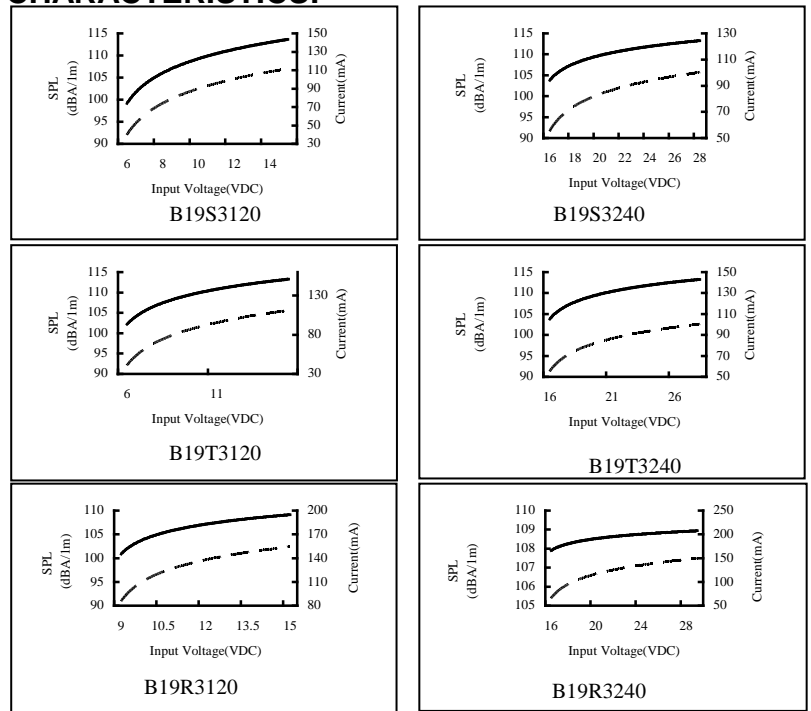

L=130mm, standard (changes as your request)

Remark: ____Pressure level Current

SPECIFICATIONS:

Model No.	Operating Voltage (VDC)	Rated Voltage (VDC)	Max. Current at Rated Voltage (mA)	Frequency (kHz)	Min. Sound Pressure at Rated Voltage (dBA/1m)	Pulse Rate at Rated Voltage (Pulse/Sec)	Tone	Terminal
B19S3120	6-15	12	150	2.8±0.5	108	0	SINGLE	LEAD
B19S3240	16-28	24	150	2.8±0.5	108	0	SINGLE	LEAD
B19T3120	6-15	12	150	(2.6-2.8)±0.5	112	0	TWO	LEAD
B19T3240	16-28	24	150	(2.6-2.8)±0.5	112	0	TWO	LEAD
B19R3120	9-15	12	150	1.5-3.5	105	0	ALARM	LEAD
B19R3240	16-28	24	150	1.5-3.5	105	0	ALARM	LEAD