

ECHO-PIEZO BUZZER


B58 SERIES



FEATURES:

- Single/pulse/siren/two/hex tone siren
- Impact resistance polycarbonate plastic housing
- Loud sound output
- Water-proof
- Sound adjustable cover
- Excellent resistance to moisture, dust and corrosion
- Operating temperature -20°C -- $+70^{\circ}\text{C}$
- Storage temperature -30°C -- $+70^{\circ}\text{C}$

DIMENSIONS: (unit: mm)

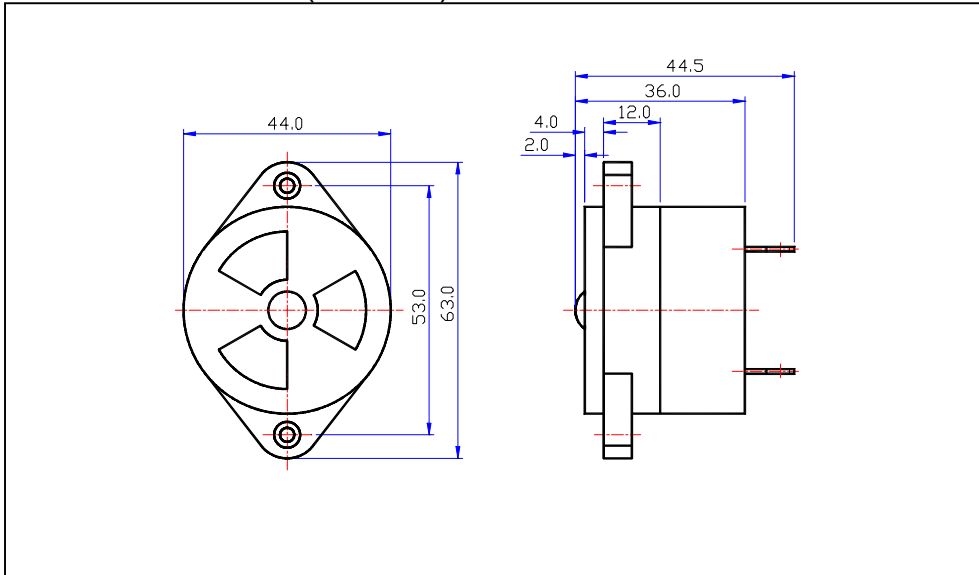

SPECIFICATIONS:

Model No.	Operating Voltage (VDC)	Rated Voltage (VDC)	Max. Current at Rated Voltage (mA)	Frequency (kHz)	Min. Sound Pressure at Rated Voltage (dBA/30cm)	Pulse Rate at Rated Voltage (Pulse/Sec)	Tone	Terminal
B58S3120	6-15	12	80	2.8±0.5	105	/	SINGLE	PIN
B58S3240	18-28	24	80	2.8±0.5	105	/	SINGLE	PIN
B58P3120	6-15	12	50	2.8±0.5	105	1.0-2.5	PULSE	PIN
B58P3240	18-28	24	50	2.8±0.5	105	1.0-2.5	PULSE	PIN
B58T3120	6-15	12	80	(2.5-2.8)±0.5	105	/	TWO	PIN
B58T3240	18-28	24	80	(2.5-2.8)±0.5	105	/	TWO	PIN
B58R3120	6-15	12	150	2.8±0.5	105	/	SIREN	PIN
B58R3120	18-28	24	150	2.8±0.5	105	/	SIREN	PIN
B58H3120	6-15	12	150	(2.0-3.0)±0.5	105	/	HEX	PIN
B58H3240	18-28	24	150	(2.0-3.0)±0.5	105	/	HEX	PIN

Hex: Standard siren, Code-alarm, Euro-siren, Slot-machine, Smoke-alarm, Ray gun