

# ECHO-PIEZO BUZZER


**B628 SERIES**







## FEATURES:

- Piezo sounder
- Loud output
- Screw mounting with leadwire terminals
- Sound adjustable cover
- Operating temperature  $-20^{\circ}\text{C}$ --- $+70^{\circ}\text{C}$
- Storage temperature  $-30^{\circ}\text{C}$ --- $+70^{\circ}\text{C}$

## DIMENSIONS:

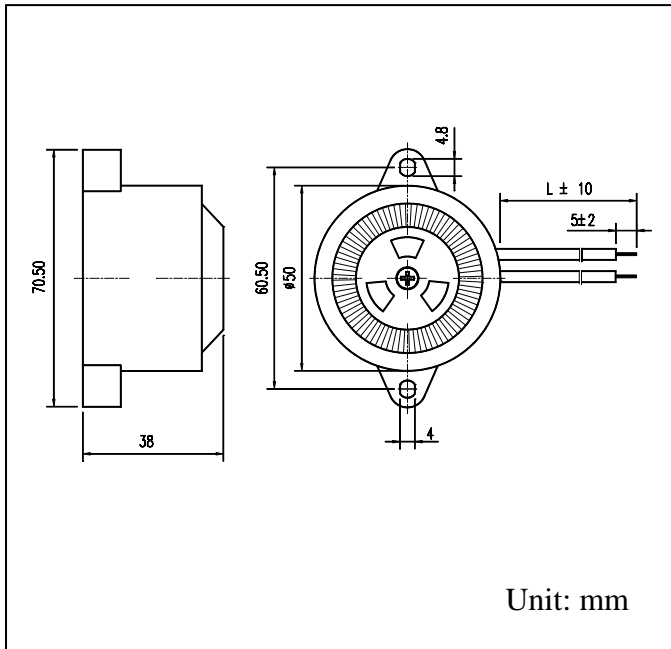

## CHARACTERISTICS:

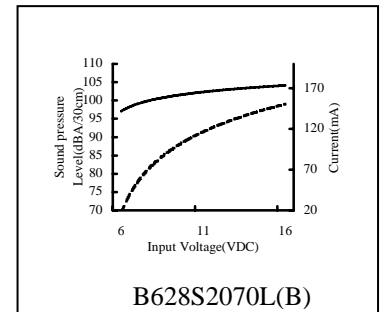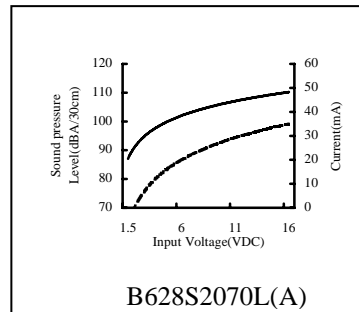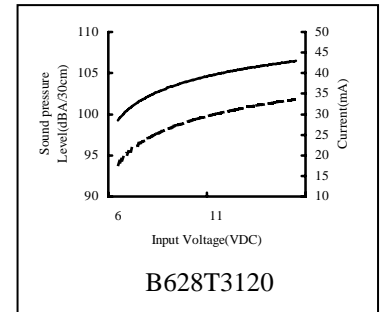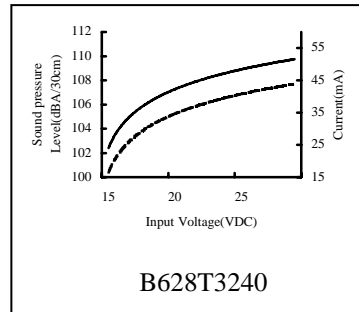

L=140mm,standard (changes as your request)

Remark: ——— Pressure level    - - - - - Current

## SPECIFICATIONS:

Model No.	Operating Voltage (VDC)	Rated Voltage (VDC)	Max. Current at Rated Voltage (mA)	Frequency (kHz)	Min. Sound Pressure at Rated Voltage (dBA/30cm)	Pulse Rate at Rated Voltage (Pulse/Sec)	Tone	Terminal
B628T3120	6-15	12	65	(3.0-3.2)±0.5	105	NIL	TWO	LEAD
B628T3240	18-28	24	65	(3.0-3.2)±0.5	105	NIL	TWO	LEAD
B628S2070(A)	3-16	7.5	40	2.5±0.5	85	NIL	SINGLE	PLATE
B628S2070(B)	3-16	7.5	70	2.5±0.5	94	NIL	SINGLE	PLATE
B628PF3120	3-16	12	45	3.0±0.5	105	2-3	PULSE	LED
B628PN3120	3-16	12	45	3.0±0.5	105	0.8-1.2	PULSE	LED