


ECHO-PIEZO BUZZER




FEATURES:

- Panel mounted
- Medium to loud sound output
- Single/pulse
- Rigid construction
- Plate terminals
- Polarity protection
- Vane Volume Control(Sound adjustable)
- Customer label(22*19mm,050-041005-02)
- Operating temperature -20°C --- $+70^{\circ}\text{C}$
- Storage temperature -30°C --- $+70^{\circ}\text{C}$

DIMENSIONS: (unit: mm)

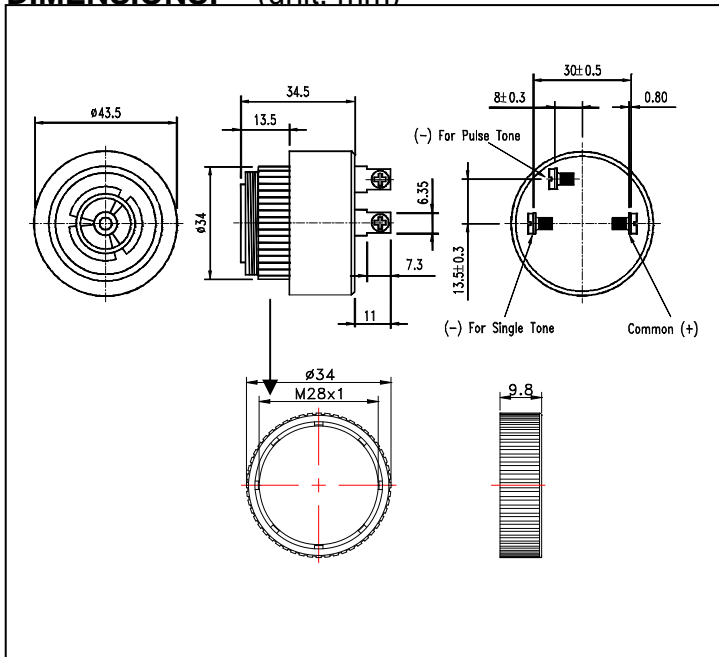

CHARACTERISTICS:

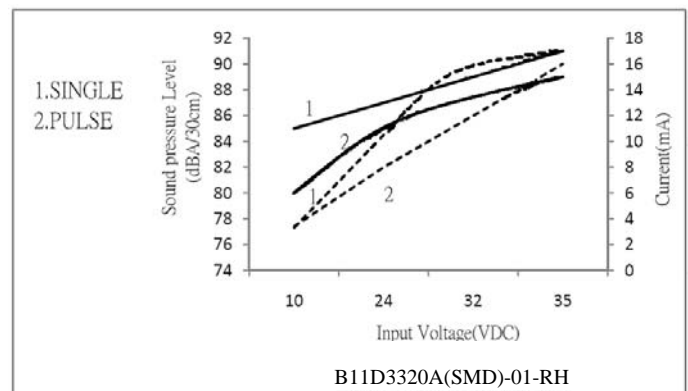

Remark: ——— Pressure level - - - - - Current

SPECIFICATIONS

Model No.	Operating Voltage (VDC)	Rated Voltage (VDC)	Max. Current at Rated Voltage (mA)	Frequency (kHz)	Min. Sound Pressure at Rated Voltage (dBA/30cm)	Pulse Rate at Rated Voltage (Pulse/Sec)	Tone	Terminal
B11D3320A(SMD)-01-RH	12-36	32	35/25	2.9 ± 0.5	85/80	0.8-1.2	SINGLE/PULSE	PLATE

.Remark:A=Sound adjustable