

ECHO- PIEZO BUZZER



B1_DIGITAL SERIES







FEATURES:

- Panel-mounted piezo buzzer
- Single tone
- Medium to loud sound output
- Screw/PCB mounting
- Operating temperature -20°C -- $+70^{\circ}\text{C}$
- Storage temperature -30°C -- $+70^{\circ}\text{C}$

DIMENSIONS:

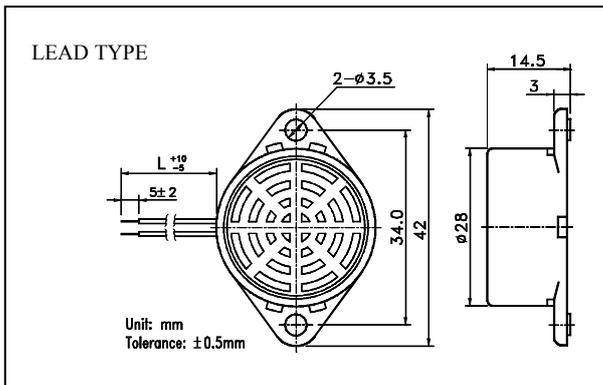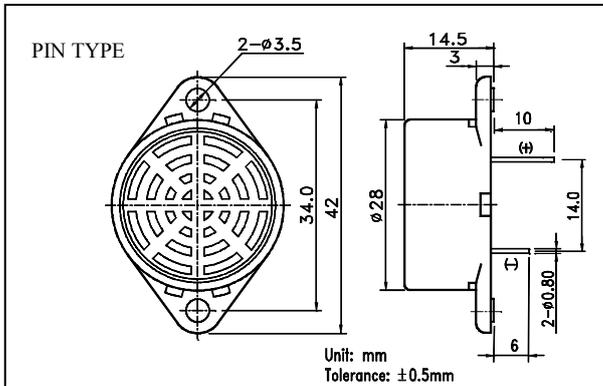

CHARACTERISTICS:

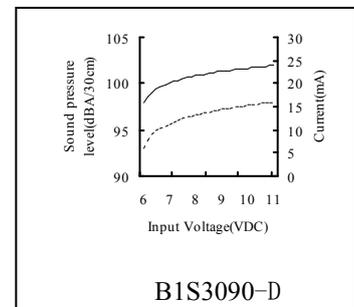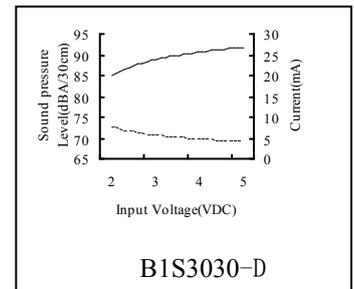

Remark: ——— Pressure level - - - - - Current


L=110mm, standard (changes as your request)

SPECIFICATIONS:

Model No.	Operating Voltage (VDC)	Rated Voltage (VDC)	Max. Current at Rated Voltage (mA)	Frequency (kHz)	Min. Sound Pressure at Rated Voltage (dBA/30cm)	Pulse Rate at Rated Voltage (Pulse/Sec)	Tone	Terminal
B1S3015-D	1-3	1.5	25	2.8 ± 0.3	80	NIL	SINGLE	LEAD/PIN
B1S3030-D	2-5	3	35	2.8 ± 0.3	85	NIL	SINGLE	LEAD/PIN
B1S3060-D	4-9	6	35	2.8 ± 0.3	85	NIL	SINGLE	LEAD/PIN
B1S3090-D	6-11	9	40	2.8 ± 0.3	85	NIL	SINGLE	LEAD/PIN

ECHO- PIEZO BUZZER



B1_DIGITAL SERIES

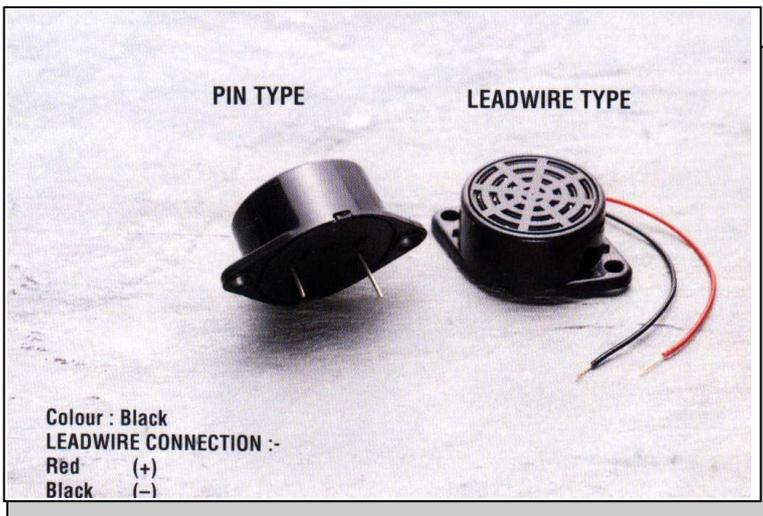




FEATURES:

- Panel-mounted piezobuzzer
- Single tone
- Medium to loud sound output
- Screw/PCB mounting
- Operating temperature -20°C -- $+70^{\circ}\text{C}$
- Storage temperature -30°C -- $+70^{\circ}\text{C}$

DIMENSIONS:

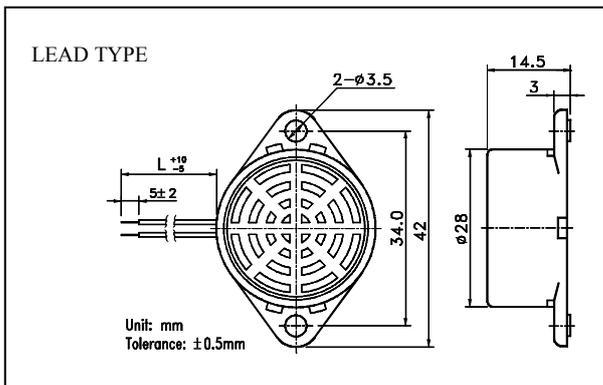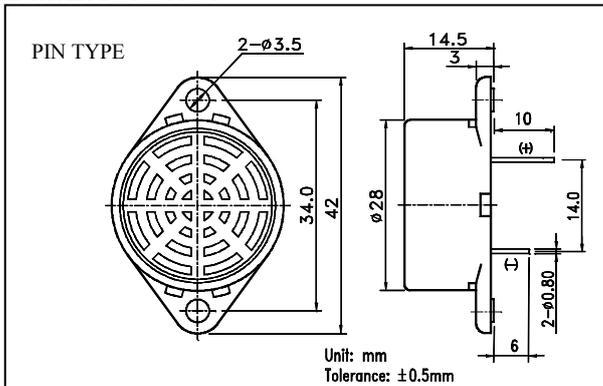

CHARACTERISTICS:

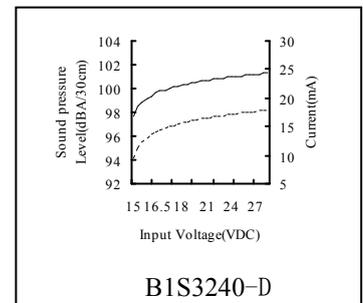

Remark: — Pressure level - - - - - Current

L=110mm, standard (changes as your request)

SPECIFICATIONS:

Model No.	Operating Voltage (VDC)	Rated Voltage (VDC)	Max. Current at Rated Voltage (mA)	Frequency (kHz)	Min. Sound Pressure at Rated Voltage (dBA/30cm)	Pulse Rate at Rated Voltage (Pulse/Sec)	Tone	Terminal
B1S3120-D	9-15	12	25	2.8±0.3	90	NIL	SINGLE	LEAD/PIN
B1S3240-D	15-28	24	25	2.8±0.3	90	NIL	SINGLE	LEAD/PIN
B1S3415-D	4-15	12	25	2.8±0.3	85	NIL	SINGLE	LEAD/PIN