



SPECIFICATION

FOR APPROVAL

Customer : _____

Description : Magnetic Buzzer

ECHO Model No. : B26S2050P

Customer's Model No. : _____

ISSUE	CHECK	APPROVAL	CUSTOMER
CaoBin	FengBaoZhong	Bosco Lo	
2023.05.09	2023.05.09	2023.05.09	



ECHO ELECTRONICS CO.,LTD.

Add:Room 3207A, 32/F., Cable TV Tower, 9 Hoi Shing Road, Tsuen Wan, New Territories, Hong Kong

Tel:(852)2412 0878

E-mail:echoelec@netvigator.com

Fax: (852)2415 4249

web:http://www.echo.com.hk



SPECIFICATIONS

Model No.

B26S2050P

Page

1/6

1. ELECTRICAL AND ACOUSTICAL SPECIFICATION

	Item	Unit	Specifications
1-1	Rated Voltage	VDC	5
1-2	Operating Voltage	VDC	4-7
1-3	* Rated Current (Max)	mA	30
1-4	* Min Sound Output at 10cm	dB	85
1-5	* Resonant Frequency	Hz	2400 ± 100
1-6	Operating Temperature	°C	-30~+70
1-7	Storage Temperature	°C	-40~+85
1-8	Weight	g	1.8
1-9	Housing Material		PBT
1-10	Lead Pin Material		Red Copper (DSn)

* Value Applying at Rated Voltage (DC)

1		2023.05.09	CaoBin	FengBaoZhong	Bosco Lo
Issue No	Description	Date	Issue	Check	Approval



<h1>SPECIFICATIONS</h1>	Model No.	B26S2050P
	Page	2/6

2. ENVIRONMENTAL TEST

	Item	Specifications
2-1	Storage in High temp.	Storage in $+85^{\circ}\text{C} \pm 2^{\circ}\text{C}$ test box for 96 hours, then expose to the room temperature for 2 hours without applying power.
2-2	Storage in Low temp.	Storage in $-40^{\circ}\text{C} \pm 2^{\circ}\text{C}$ test box for 96 hours, then expose to the room temperature for 2 hours without applying power.
2-3	Storage in Humidity	Storage in $+40^{\circ}\text{C} \pm 2^{\circ}\text{C}$ 90-95%RH test box for 96 hours, then expose to the room temperature for 2 hours without applying power.
2-4	Thermal cycle test.	<p>Make this test for 5 cycles without applying power, then expose to the room temperature for 2 hours.</p>
2-5	Vibration test	<p>Amplitude: 1.5mm Time : 1min/axis</p> <p>Make this test for the directions of X, Y, Z for 2 hours each (total 6 hours).</p>
2-6	Drop test	Free drop a unit from the height 100cm to the surface of 10mm thick board, three directions (X, Y, Z).
2-7	Solderability test	Soldering temp.: $260 \pm 5^{\circ}\text{C}$ Heat applying time: $3 \pm 0.5\text{sec}$.

PASS CRITERION :

After these tests, the change of S.P.L shall be within $\pm 5\text{ dB}$.

1		2023.05.09	CaoBin	FengBaoZhong	Bosco Lo
Issue No	Description	Date	Issue	Check	Approval

<h1>SPECIFICATIONS</h1>	Model No.	B26S2050P
	Page	3/6

3.MEASURING METHOD(BUZZER MODE)

3-1 .Test Condition

3-1-1.STANDARD

Temperature : $25 \pm 3^{\circ}\text{C}$

Relative humidity : 60% ~ 70%,

Atmospheric pressure : 860mbar to 1060mbar

3-1-2.JUDGEMENT

Temperature : $15 \sim 35^{\circ}\text{C}$


Relative humidity : 45% ~ 85%,

Atmospheric pressure : 860mbar to 1060mbar.

3-2 . Standard Test Fixture

1.rated Voltage:5VDC

2.Resonant Frequency: $2400 \pm 100\text{Hz}$

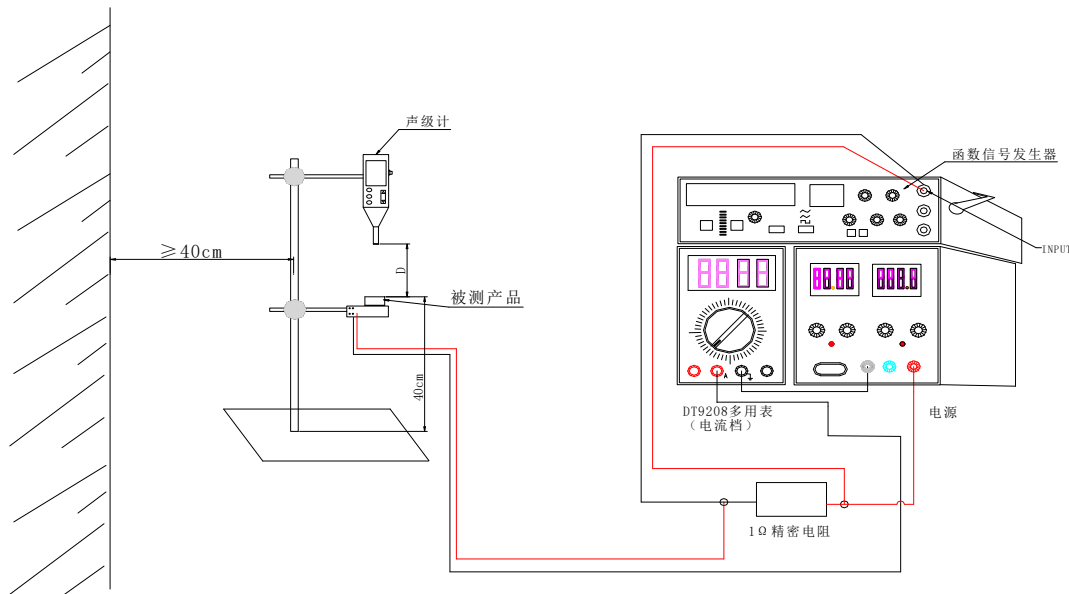

1		2023.05.09	CaoBin	FengBaoZhong	Bosco Lo
Issue No	Description	Date	Issue	Check	Approval

SPECIFICATIONS

Model No.


B26S2050P

Page

4/6

4.DIMENSIONS

Unless otherwise specified, tolerance: ± 0.5 (unit:mm)

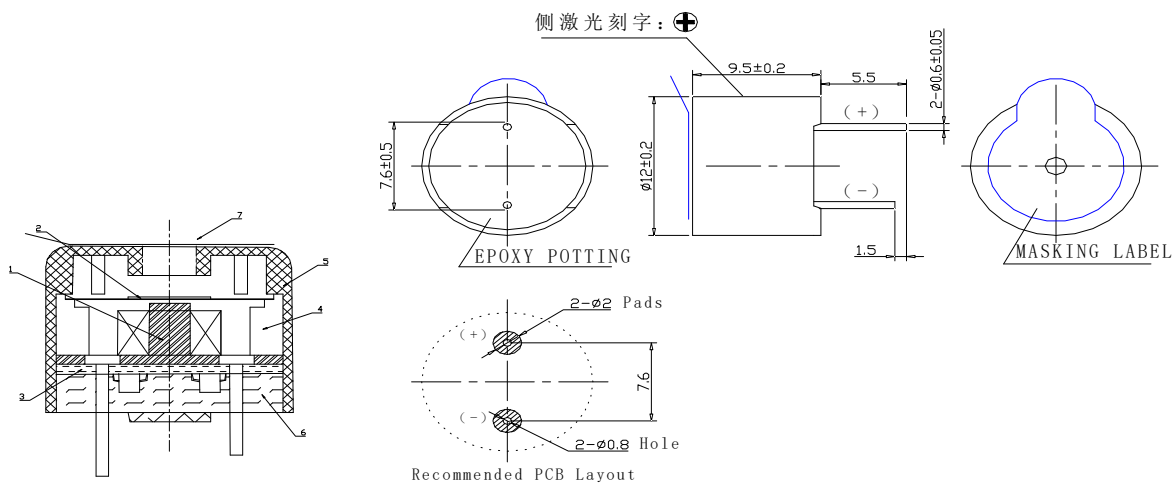

Cadmium(Cd)/Cndmium Compounds	≤ 100 ppm
Lead (Pb) / Lead Compounds	≤ 800 ppm
Mercury (Hg) Merrcury Compounds	≤ 800 ppm
Hexavalent-Chromium (Cr6+) Compounds	≤ 800 ppm
PBB	≤ 800 ppm
PBDE	≤ 800 ppm

- 1) All parts must be meet to ROHS.
- 2) Wave solder and wash allowed.

7	Masking label	1	paper	
6	Potting		Exopy	
5	Housing	1	PBT	
4	Magent	1	Ferrite	
3	PCB	1	Exopy	
2	Diaphragm	1	Iron	
1	Coil Part	1	Copper And Iron	
Part No.	Part Name	Q'TY	Material	Remark

1		2023.05.09	CaoBin	FengBaoZhong	Bosco Lo
Issue No	Description	Date	Issue	Check	Approval

SPECIFICATIONS


Model No.

B26S2050P

Page

5/6

5.PACKING

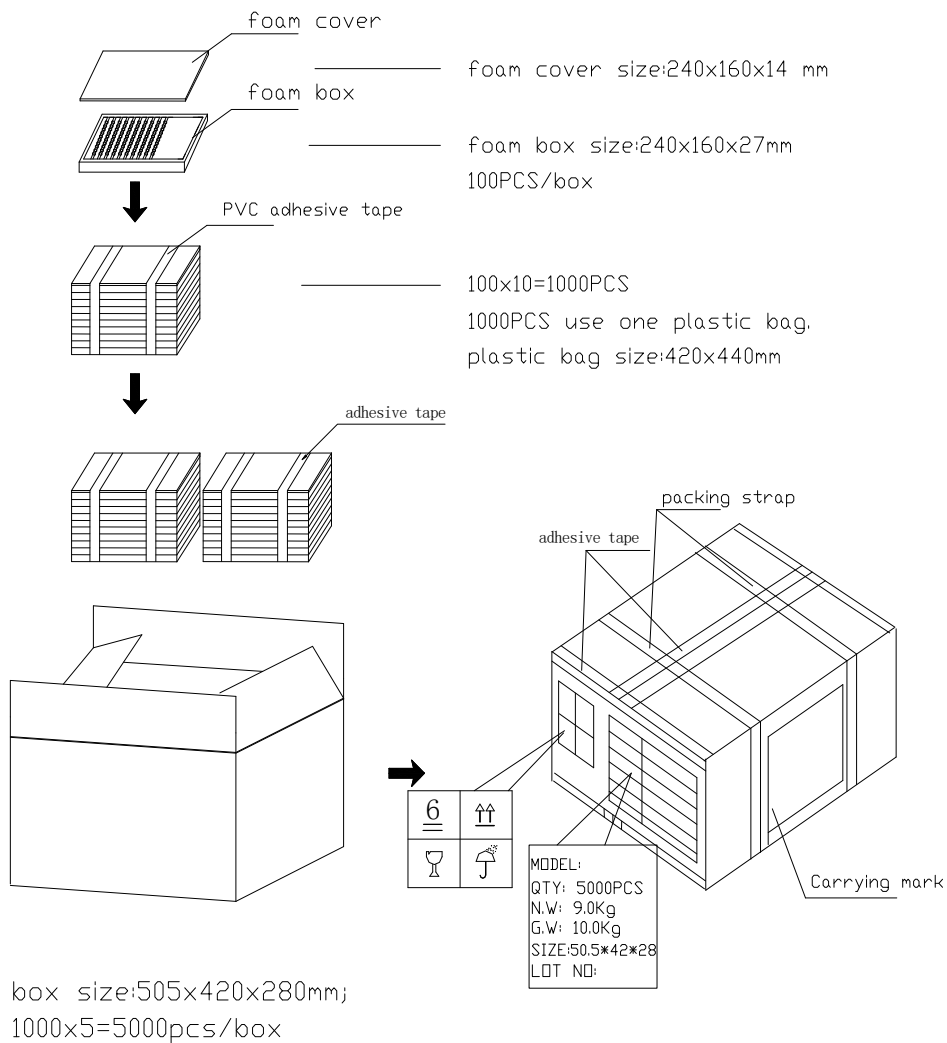

1		2023.05.09	CaoBin	FengBaoZhong	Bosco Lo
Issue No	Description	Date	Issue	Check	Approval



SPECIFICATIONS


Model No.

B26S2050P


Page

6/6

6.CURVE

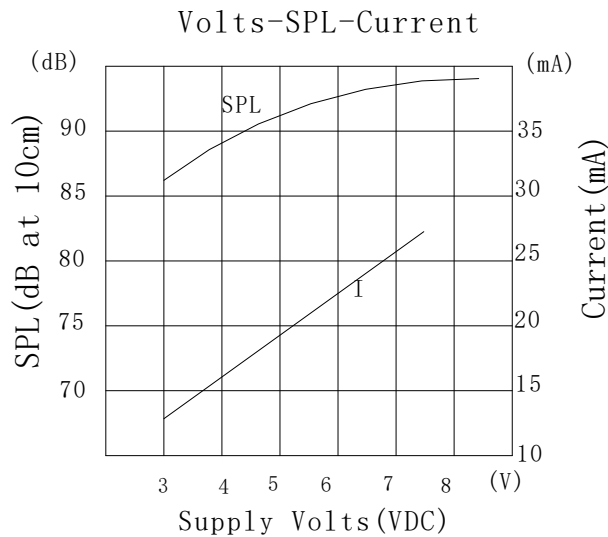

7.WAVE SOLDER CURVE

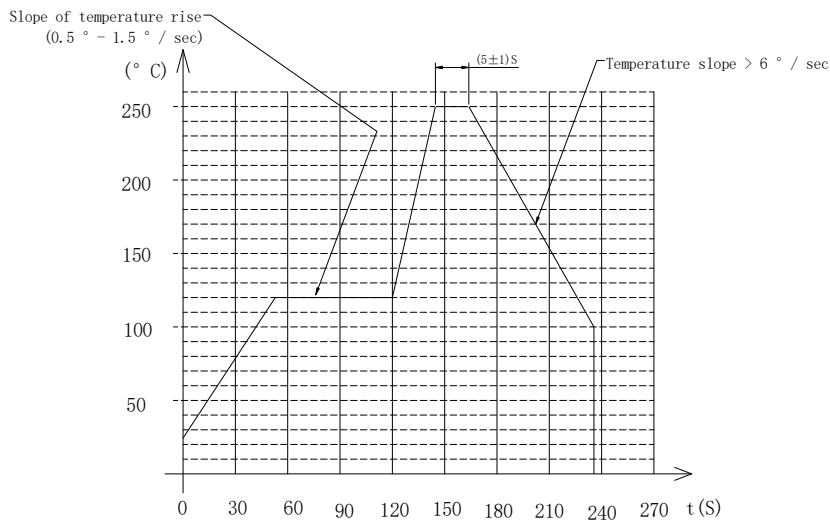

1		2023.05.09	CaoBin	FengBaoZhong	Bosco Lo
Issue No	Description	Date	Issue	Check	Approval